INSTRUMENT CURRENT TRANSFORMER

1.6" Internal Diameter

Width 1.3"






- Application Metering
- Frequency 50 60hz
- AC capability 50 2000 Amperes
- Insulation Class 0.6kV, 10kV BIL full wave
- Other ratios available upon request
- Rating Factor: 1.0 @ 30C ambient
- Secondary leads are UL 1015 105 C, #18 AWG, 96" long
- Approximate weight 1 lbs
- UL and cUL Certified per ANSI/IEEE C57.13 standard




ELECTRICAL SPECIFICATIONS

CATALOG	CURRENT	ACCURACY	BURDEN VA	SECONDARY WINDING
NUMBER	RATIO (A)	AT 60HZ	AT 60HZ	RESISTANCE(OHMS @75C)
ICT28001	1000:1	0.6%	1.0	

MECHANICAL SPECIFICATIONS

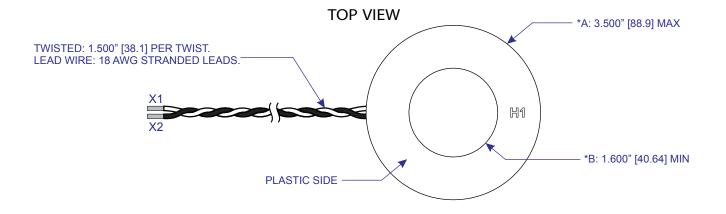

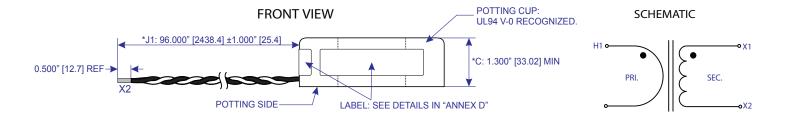

+1.305.662.7276 | www.falco.com | sales@falco.com AUG 2017