




MAX. DIM :
L = 23.88 mm
W = 12.19 mm
H = 25.40 mm

- For application at 50/60 Hz.
- Rated current available up to 60 Amps.

MECHANICAL SPECIFICATIONS

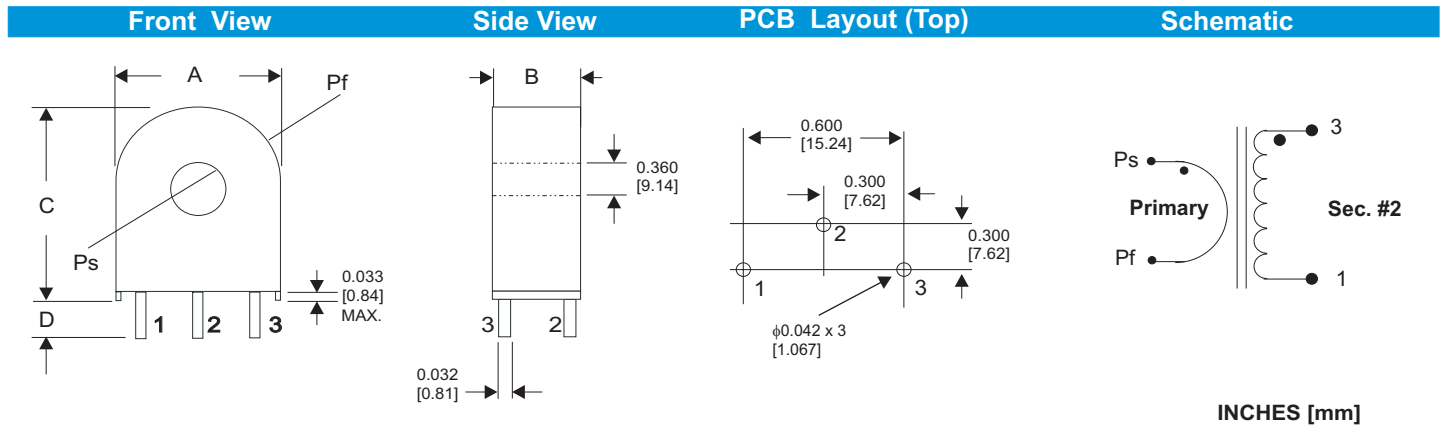

ELECTRICAL SPECIFICATIONS

FALCO PART NUMBER	RoHS PART NUMBER	V/A	TOL.	Turns Ratio	I _{rms} max. (Amps.)	DCR (Ω) ¹ max.	A max. in / mm	B max. in / mm	C max. in / mm	D min. in / mm
T75001		0.100	±2%	1000:1	60.00	43.00	0.940 / 23.88	0.480 / 12.19	1.000 / 25.40	0.200 / 5.08
	T75L01	0.100	±2%	1000:1	60.00	46.20	0.940 / 23.88	0.480 / 12.19	1.000 / 25.40	0.200 / 5.08
	T75B01	0.100	±2%	1000:1	60.00	46.20	0.940 / 23.88	0.480 / 12.19	1.000 / 25.40	0.170 / 4.32
T750A2		0.100	±2%	1000:1	15.00	44.00	0.940 / 23.88	0.480 / 12.19	1.000 / 25.40	0.200 / 5.08

Primary is supplied by end user.

1. DCR tested at Ta= 25°C.



RoHS COMPLIANT PRODUCT